

A

Installation Case:  
Roof Mounting (Injection Molding Workshop)


Ventilator Model : EX767  
Airflow : 16000 m<sup>3</sup>/h  
Coverage : 100 ~ 130 m<sup>2</sup>  
Air Exchange Rate : 30 ~ 32 t/h  
Air Diffuser Model : 4 x PR450  
Air Blowing Area : 5 ~ 7.5 m

Matched Accessories :

- Outdoor Galvanized Duct
- Rainproof Cover
- Hanger

Indoor Duct :

- 20 m
- PIP Cellduct / Galvanized Duct

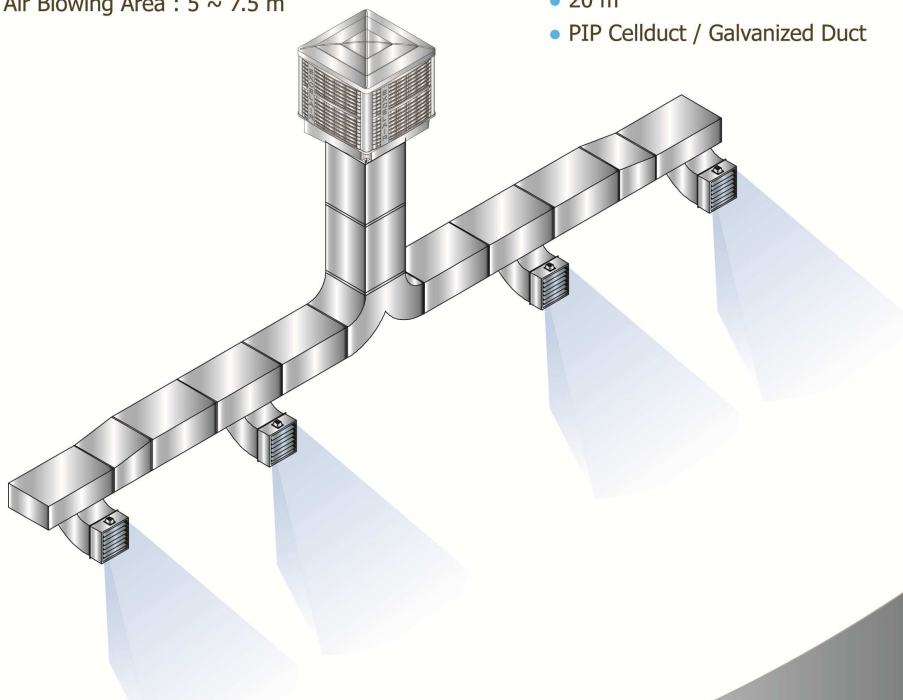

■ The length of the duct and the number of air diffuser may increase or decrease according to the installation environment, and Excelair will provide the final cooling scheme design and quotation after on-site survey.



Cools workspace down to about 25-30 °C in tropical climate of Southern China especially in Guangzhou area.



Cooling media is capable of filtering dusts in the air 80% of 1µm and supply fresh, cool and clean air to the workspace.



Supply air is 100% mist free.

**COVER**age Each unit covers 100 to 130 m<sup>2</sup> of workspace, Systems can be added on line-by-line.

(B)

### Installation Case: Roof Mounting

Ventilator Model : EX767

Airflow : 16000 m<sup>3</sup>/h

Coverage : 100 ~ 130 m<sup>2</sup>

Air Diffuser Model : 1 x PRD6


Air Blowing Area : Φ12 m

Matched Accessories :

- Outdoor Galvanized Duct
- Rainproof Cover
- Hanger

Indoor Duct :

- 6 m
- PIP Cellduct / Galvanized Duct

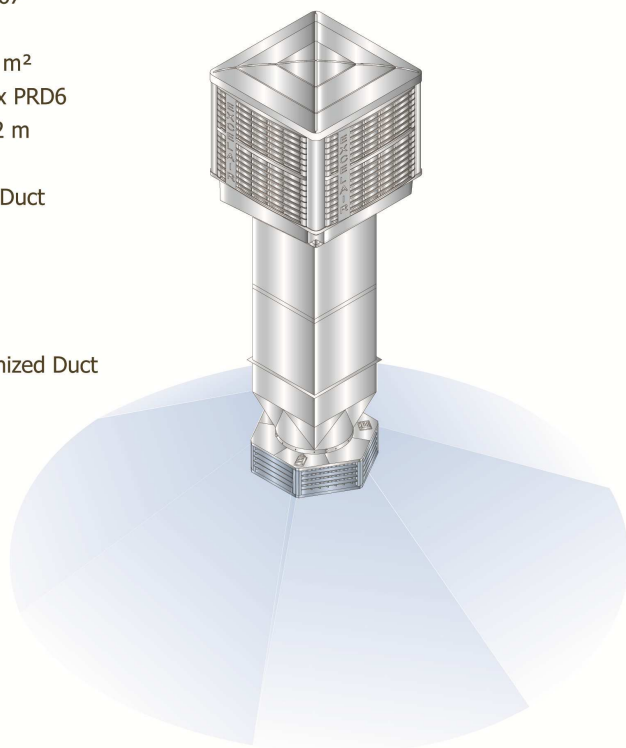

- The length of the duct and the number of air diffuser may increase or decrease according to the installation environment, and Excelair will provide the final cooling scheme design and quotation after on-site survey.



Cools workspace down to about 25-30 °C in tropical climate of Southern China especially in Guangzhou area.



Cooling media is capable of filtering dusts in the air 80% of 1µm and supply fresh, cool and clean air to the workspace.




Supply air is 100% mist free.

**COVER**age Each unit covers 100 to 130 m<sup>2</sup> of workspace, Systems can be added on line-by-line.



Installation Case:  
Wall Mounting (Injection Molding Workshop)

Ventilator Model : EX767  
Airflow : 16000 m<sup>3</sup>/h  
Coverage : 100 ~ 130 m<sup>2</sup>  
Air Exchange Rate : 30 ~ 32 t/h  
Air Diffuser Model : 6 x PR350  
Air Blowing Area : 5 ~ 6 m

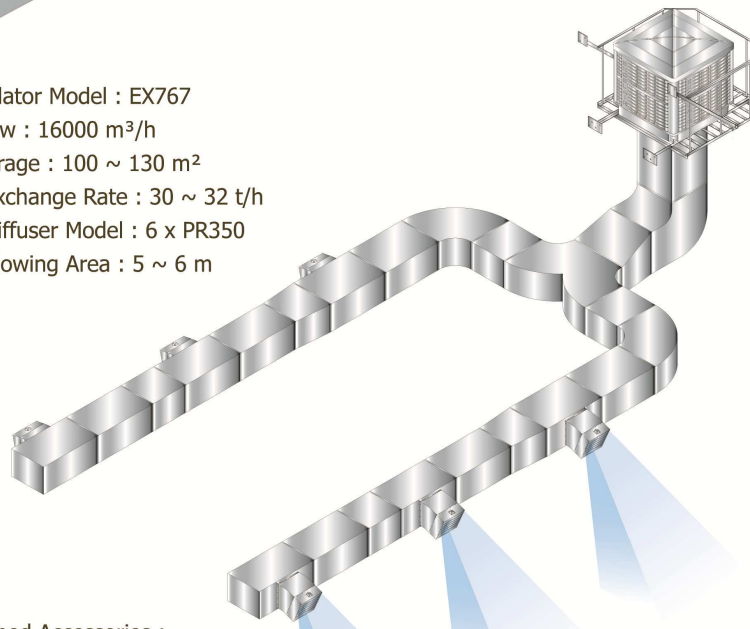


Matched Accessories :

- Maintenance Platform
- Outdoor Galvanized Bended Duct
- Support and Hanger

Indoor Duct :

- 20 m
- PIP Cellduct / Galvanized Duct



Installation Way

■ The length of the duct and the number of air diffuser may increase or decrease according to the installation environment, and Excelair will provide the final cooling scheme design and quotation after on-site survey.



Cools workspace down to about 25-30 °C in tropical climate of Southern China especially in Guangzhou area.



Cooling media is capable of filtering dusts in the air 80% of 1µm and supply fresh, cool and clean air to the workspace.



Supply air is 100% mist free.

**COVER**age Each unit covers 100 to 130 m<sup>2</sup> of workspace, Systems can be added on line-by-line.